



Impresa. The Standard in Custom Showers



A stack of four smooth, light-colored stones is positioned on a sandy surface. The stones are stacked vertically, with the top stone being the smallest and the bottom stone being the largest. The background is a soft-focus view of a beach with sand and some greenery in the distance.

Contents:

- 01. Impresa Defined
- 02. Impresa Sets the Standard
- 03. METRO
- 11. Stile
- 19. Stile Stainless
- 23. QuikNICHE Recessed Shampoo Shelf
- 25. Ordering Impresa Products
- 26. Impresa Warranties



Impresa...Defined

Impresa, a New Zealand owned company specialises in the manufacturing of tileable-tray shower systems. With a wealth of experience of the critical issues and knowing our trade inside-out, we possess unequalled expertise. We liaison directly with customers in a personal, professional manner, and provide one-on-one installation support – something not seen with other companies. With a can-do attitude we have established strong, on-going relationships with specifiers and tradesmen alike NZ-wide.

Make the most of our expertise by investing in a 100% watertight Impresa shower system... showers with a proven record of protecting homes against expensive water damage and rot whilst simultaneously being a stunning bathroom centrepiece.

***Design Expertise.
Unrivalled Customer Support.***





Impresa Sets the Standard ...

Design Expertise...

With the capabilities of CAD design and CNC manufacturing, Impresa provides customers uniquely-designed showers which are surprisingly affordable, especially compared to standard 'off-the-shelf' trays. Utilising thick aluminium – a naturally waterproof and durable material, we manufacture shower trays featuring accurate dimensioning, high sides, and thresholds where needed, all finished to consistent quality-control procedures – the result is a shower tray with the highest degree of stability and durability available. No half-measures here.

Impresa shower trays eliminate the leak-prone areas at wall and drainage junctions and do not rely on thin paint-on membranes widely known to fail with foam bases and other base types constructed from various materials glued together. We provide the best dependable answer to the problem of 'on-site constructed' bases and leaky-shower coatings.

Now operating for over 10 years, Impresa has proudly earned the reputation as NZ's leading supplier of custom tile shower systems.

The 'Custom-Option' Total Design Freedom...

Only Impresa offers total design freedom. We specialise in tile shower systems designed and manufactured to your exacting specifications. You decide the size, shape and glass requirements or choose from our range of standard sizes.

The 'Platinum 25-Year Leakproof Guarantee'...

Impresa's unmatched expertise in waterproofing and shower tray manufacturing provides the surety of our Platinum 25-Year Leakproof Guarantee.

Impresa...NZ's Leading Supplier of Custom Tile Shower Systems





METRO Channel Drain Shower



Setting the Standard in Tile Showers

The pinnacle of modern shower design with it's sleek channel drain, METRO is **fully customisable** offering unrivalled design freedom.

METRO is also available in a full range of standard sizes.

- 3mm thick, marine-grade, epoxy-coated aluminium
- Fibre-glass reinforced tray
- Sleek channel-drain along any side -- Choice of 3 cover options
- 10mm Frameless Glass
- **FULLY CUSTOMISABLE** (Tray and Glass)
- Full range of standard sizes / shapes
- **Platinum 25-Year Leak Proof Guarantee on tray**
- Quik NICHE recessed soap / shampoo niche optional



MADE TO MEASURE



10mm GLASS




METRO Level-Entry Corner with Sliding Door



METRO Level-Entry Corner with Side Channel Drain


The METRO channel drain can be positioned along any side of the shower tray. The waste-outlet position is flexible to avoid joists and other underfloor obstructions. Glass enclosures are also customisable.



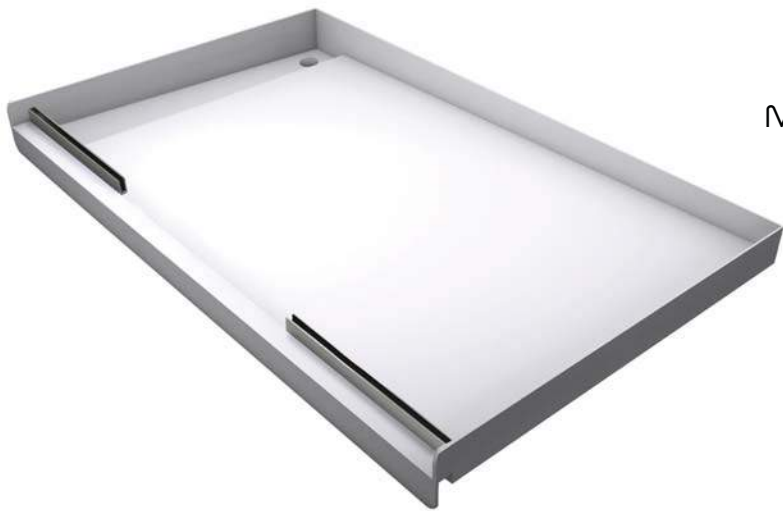

METRO Tileable Tray

- Tray options: On-Floor / Level-Entry / Wheelchair-Entry
- One-piece, 3mm thick, Marine-Grade Aluminium
- Top surface epoxy-coated
- Standard Design - single plane slope to a channel drain
- **Custom** sizes and drain placement optional
- Generous side-upstands
- Tray glazing channels factory-attached
- Tray underside fully supported -- no flexing
- Easy-clean trap or *waste supplied *(‘P’- trap required)
- Simple to install
- **Platinum 25-Year Leakproof Guarantee**

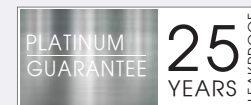

Frameless Glass Enclosure

- **10mm** thick toughened glass.
- Standard height 2000mm. Optional height available
- NZ Standard compliant to AS/NZS 2206:1996
- Full enclosure, sliding door, panel-only options
- **Custom options** -- Ultra-clear, floor-to-ceiling, frosted
- Matt aluminium-finish anodised glazing channels -- Tolerance for out-of-plumb walls
- Quality chromed-brass, self-centring hinges
- Polished Stainless-steel Round 'D' Handle set standard (Optional handles available)
- 10 Year Warranty

CHANNEL COVER OPTIONS



HANDLE OPTIONS



Round 'D'



Square 'D'



Round 'H'




Square 'H'




Pull

2-SIDED SQUARE SHOWER

LEFT-HAND




RIGHT-HAND




900 x 900
1000 x 1000
1100 x 1100

2-SIDED RECTANGLE SHOWER

LEFT-HAND




RIGHT-HAND




1200 x 900	1500 x 1000
1200 x 1000	1600 x 1000
1400 x 1000	1800 x 1000
1500 x 900	2000 x 1000

3-SIDED ALCOVE SHOWER



900 x 900	1400 x 1000
1000 x 900	1500 x 900
1000 x 1000	1500 x 1000
1200 x 900	1600 x 1000
1200 x 1000	1800 x 1000
1300 x 1000	2000 x 1000

NOTE: Door Arc 180 - Inward / Outward

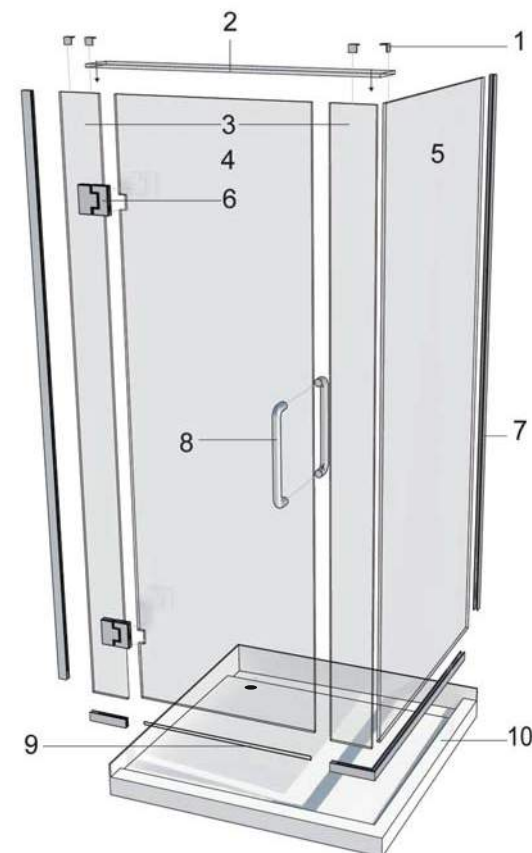

GLASS ENCLOSURE COMPONENTS

1. Brace Panel Clamps
2. Glass Brace Panel
3. Glass Enclosure Sidelites
4. Glass Enclosure Door
Widths: 600, 650, 700 (Optional available)
5. Return Panel
6. Bright Chrome Hinges
7. Wall Channel -- Aluminium Matte finish
-- Optional: Bright finish
8. Polished Stainless-steel 'D' Handle Set
(Optional Available)
9. Vinyl Door Wipe Seal
10. METRO Shower Tray

METRO Shower Specifications

METRO SHOWER BASE / TRAY

- One-piece, 3mm thick, marine-grade, epoxy-coated aluminium.
- Fibreglass-reinforced tray underside. Fully supported
- Single-plane slope to drainage channel: 'Fall' 1:50 to rear, front, left-hand or right-hand integral channel-drain
- Standard waste outlet position: End of drainage channel. Optional position possible
- CUSTOM SIZES and waste-outlet position optional
- Tiling membrane factory-applied to tray -- allows usage of cementitious tile adhesive
- STANDARD SIZES: 30 plus
- Glazing channels: Matte-aluminium finish standard, Bright-polished finish optional. Factory-installed to inside of tray
- Platinum 25-Year Leakproof Guarantee

ON-FLOOR TRAY

- 'On-Floor' tray -- Installation on timber or concrete floor. Threshold height 60mm. min. Threshold width 50mm.
- 'Step-down' 15mm from top of the threshold into tray for optimum water containment

LEVEL-ENTRY TRAY

- 'Level-Entry' tray (15mm step-down) -- Installation onto rebated timber or concrete floor

WHEELCHAIR ACCESS TRAY

- 'Wheelchair-Access' tray -- Flush entry (no step-down) -- Installation onto rebated timber or concrete floor. Available alcove tray / rear channel-drain only

CHANNEL-DRAIN / EASY-CLEAN TRAP or WASTE

- Integral channel-drain with 40mm dia. easy-clean trap or waste (P- Trap required)
- Custom positioning of waste-outlet available

CHANNEL COVER / GRATE OPTIONS

- (A) Stainless-steel Slotted-top (B) Stainless-steel Solid-top (C) Tileable channel cover (D) Stainless-steel Wedge-Wire (optional)

FRAMELESS GLASS ENCLOSURE

- Thickness: 10mm toughened-glass.
- Standard Height: 2000mm. (Optional height)
- NZ Safety Standard compliant to AS/NZS 2206:1996
- Full enclosure with swing or sliding door, or 'Walk-in' panel-only
- Hinges -- Chrome-on-brass. Self-centring
- Handle -- Polished Stainless-steel Round 'D'. (Optional handles)
- Tray glazing channel -- Matte aluminium finish. Factory-applied
- Wall glazing channel -- Matte aluminium finish. Bright finish optional
- Channels applied directly to waterproofed walls

IMPRESA WRAP WALL MEMBRANE


- Peel and stick waterproof sheet membrane for shower walls
- Thickness 1mm nominal. Standard height 2000mm. (Optional height)
- Composition: Waterproof butyl-rubber self-adhesive with non-woven polyester fabric tileable surface. Compatible with approved polymer-modified tiling adhesives. See 'Approved Waterproofing and Adhesives'
- Optional to liquid applied membranes
- *Available Auckland only

LIQUID-APPLIED WALL MEMBRANES

- Optional to Impresa Wrap. Supplied by tiler or waterproofing sub-contractor. See 'Approved Waterproofing and Membranes'

INSTALLATION

- Tray to be installed with polymer-modified tile adhesive.
- Impresa Wrap Membrane to be applied by approved, licenced applicator
- Tile to be installed with correct tile adhesives. See 'Approved Waterproofing and Adhesives'
- Frameless-glass enclosure to be installed by an Impresa-approved or experienced frameless-glass installer

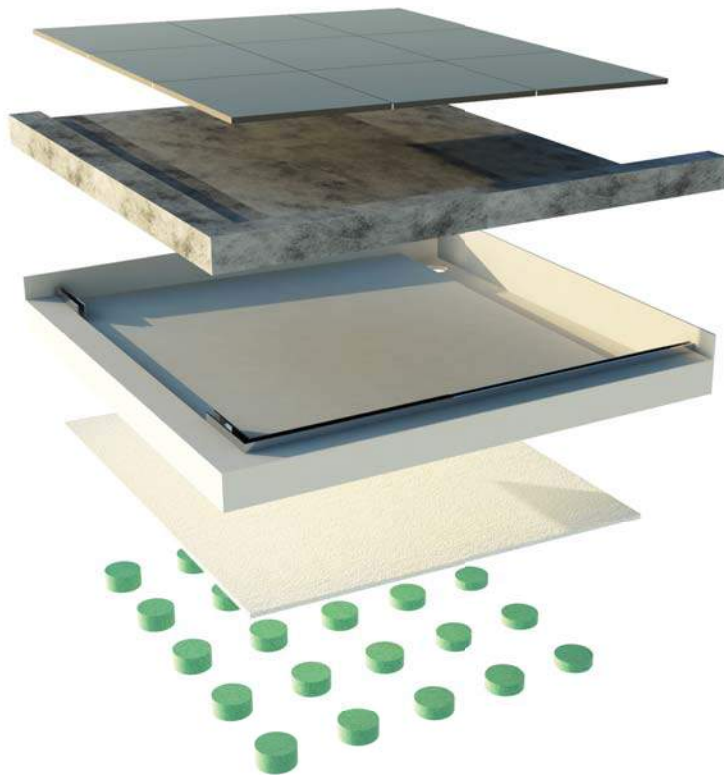


Tiles

Tiling membrane


METRO tray

Fibre-glass reinforcement


Tray support pads

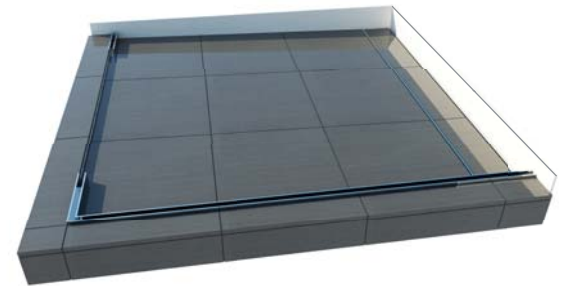


METRO tray with tiled channel cover

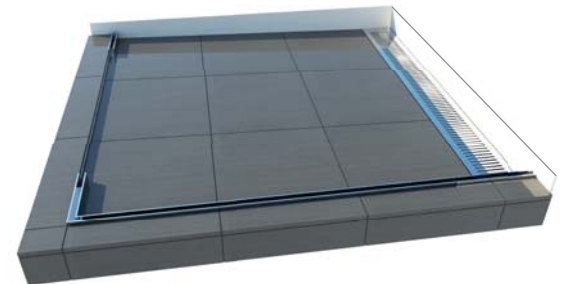

METRO tray with slotted channel cover

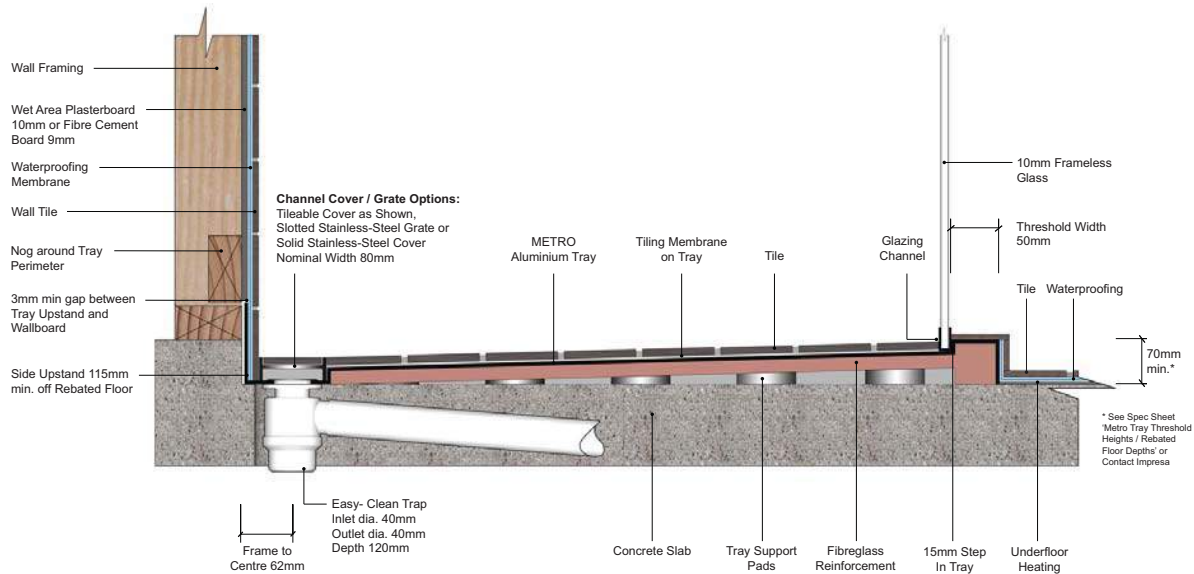

On-Floor installation
Suitable concrete or timber floor
Available with optional drain placement

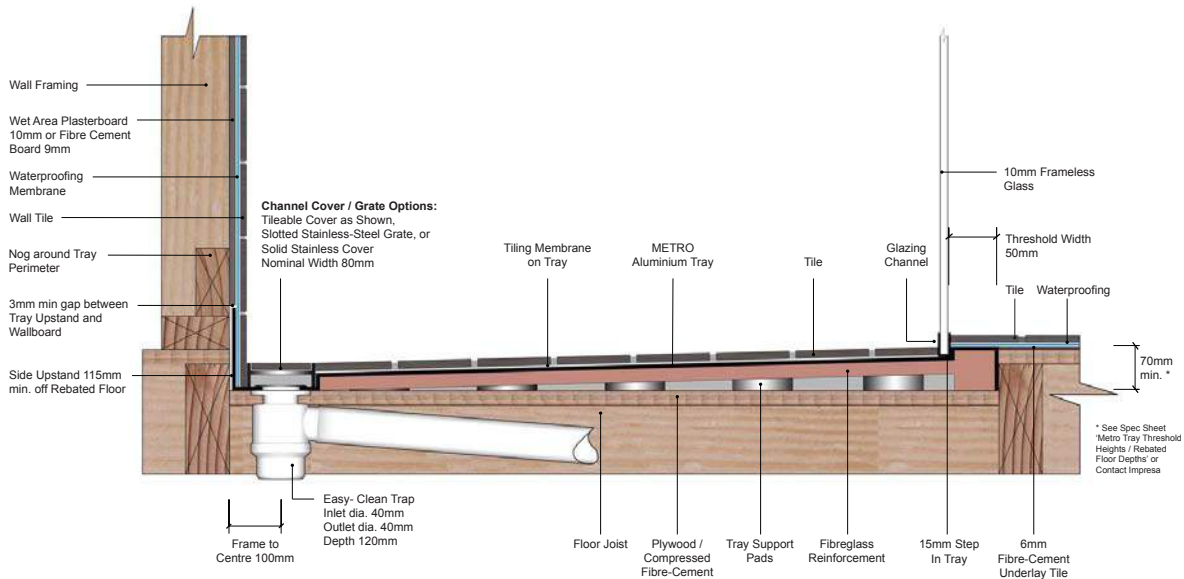

CUSTOM SIZE TRAYS AVAILABLE

Recessed Level-Entry installation
Suitable concrete or timber floor
Available with optional drain placement



Stile Tile Shower System



Stile is a 'True Original-Design' shower tray offering the minimalist appeal of clean lines of full, un-cut tiles.

As with all-things-Impresa, Stile shower trays are **fully customisable** from tray size, shape, and drain placement.

Stile is also available in a full range of standard sizes.

- 3mm thick, marine-grade, epoxy-coated aluminium
- Fibre-glass reinforced tray
- Drain in any corner or custom placement
- 10mm Frameless Glass
- **FULLY CUSTOMISABLE** (Tray and Glass)
- Full range of standard sizes / shapes
- **Platinum 25-Year Leak Proof Guarantee on tray**
- Quik NICHE recessed soap / shampoo niche optional



MADE TO MEASURE



10mm GLASS




Stile On-Floor Alcove



Stile On-Floor Angle

Stile trays can be customised to suit your requirements. Suitable for recessed or on-floor installation. The drain outlet can be positioned anywhere on the tray to avoid joists and other underfloor obstructions. Glass enclosures are also customisable.



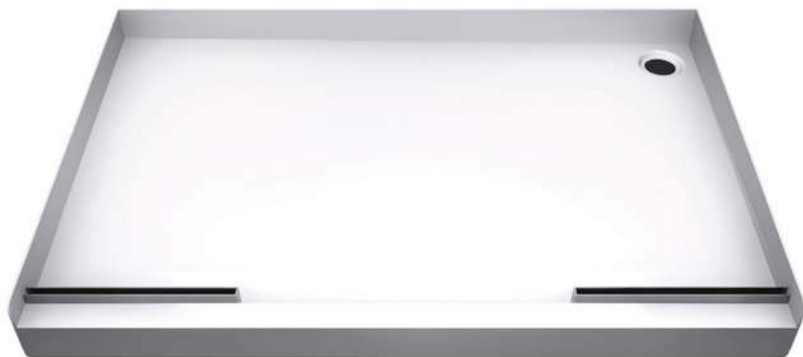

STILE GRATE

Stile Tray

- Tray options: On-Floor / Level-Entry / Wheelchair-Entry
- One-piece, 3mm thick, Marine-Grade Aluminium
- Top surface epoxy-coated
- Standard-design -- single plane slope to a corner drain
- **Custom** sizes and drain placement optional
- Generous side-upstands
- Tray glazing channels factory-attached
- Tray underside fully supported -- no flexing
- Easy-clean trap
- Simple to install
- **Platinum 25-Year Leakproof Guarantee**



Frameless Glass Enclosure

- **10mm** thick toughened glass.
- Standard height 2000mm. Optional height available
- NZ Standard compliant to AS/NZS 2206:1996
- Full enclosure, sliding door, panel-only options
- **Custom options** -- Ultra-clear, floor-to-ceiling, frosted
- Matt aluminium-finish anodised glazing channels
-- Tolerance for out-of-plumb walls
- Quality chromed-brass, self-centring hinges
- Polished Stainless-steel Round 'D' Handle set standard (Optional handles available)
- 10 Year Warranty



Round 'D'



Square 'D'



Round 'H'



Square 'H'




Pull

HANDLE OPTIONS




Stile Standard Sizes


2-SIDED CORNER SHOWER

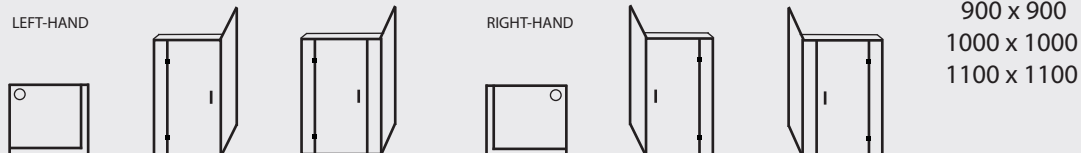


2-SIDED RECTANGLE SHOWER

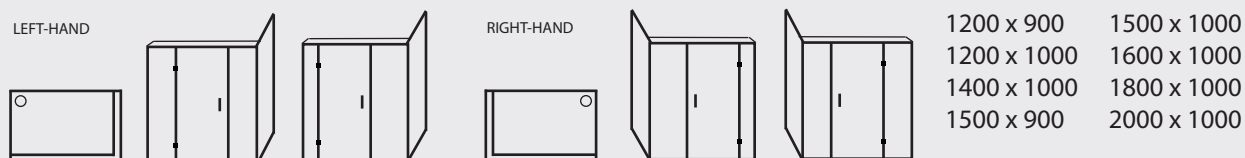

3-SIDED ALCOVE SHOWER

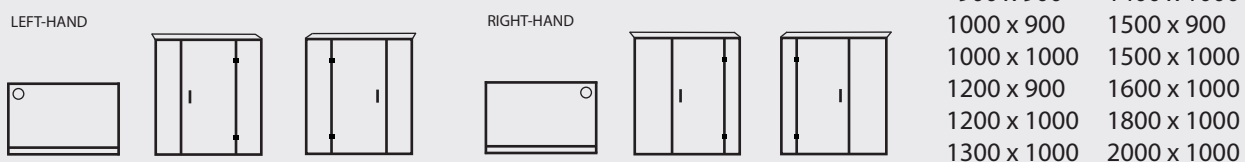

ANGLE SHOWER

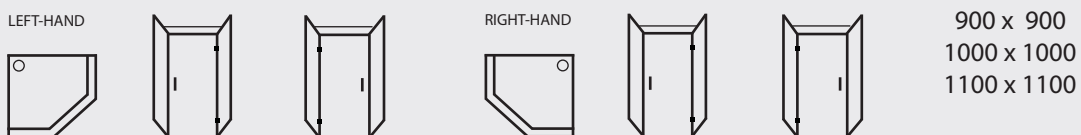

NOTE: Door Arc 180° - Inward / Outward



GLASS ENCLOSURE COMPONENTS

1. Brace Panel Clamps
2. Glass Brace Panel
3. Glass Enclosure Sidelites
4. Glass Enclosure Door
Widths: 600, 650, 700 (Optional available)
5. Return Panel
6. Bright Chrome Hinges
7. Wall Channel -- Aluminium Matte finish
-- Optional: Bright finish
8. Polished Stainless-steel 'D' Handle Set
(Optional Available)
9. Vinyl Door Wipe Seal
10. STILE Shower Tray

Stile Shower Specifications



STILE SHOWER BASE / TRAY

- One-piece, 3mm thick, marine-grade, epoxy-coated aluminium.
- Fibreglass-reinforced tray underside. Fully supported -- No flexing
- Single-plane slope to rear or front corner waste-outlet
- Optional centre or off-centre waste outlet
- STANDARD SIZES: 30 plus
- CUSTOM SIZES and waste-outlet position optional
- Tiling membrane factory-applied to tray -- allows usage of cementitious tile adhesive
- Glazing channels: Matte-aluminium finish standard, Bright-polished finish optional. Factory-installed to inside of tray
- Platinum 25-Year Leakproof Guarantee

ON-FLOOR TRAY

- 'On-Floor' tray -- Installation on timber or concrete floor. Threshold height 60mm. Threshold width 50mm.
- 'Step-down' 15mm from top of the threshold into tray for optimum water containment

LEVEL-ENTRY TRAY

- 'Level-Entry' tray (15mm step-down) -- Installation onto rebated timber or concrete floor

WHEELCHAIR ACCESS TRAY

- 'Wheelchair-Access' tray -- Flush entry (no step-down) -- Installation onto rebated timber or concrete floor.

EASY-CLEAN TRAP

- Standard position: Tray rear or front corner. Trap outlet pipe 40 / 50mm dia. Flow rate: Max. 35 litres / min. Stainless-steel grate
- Custom position: Trap outlet 50mm dia. Tile-insert Top flush with tile. Flow rate: 60-90 litres / min.
- Optional Hi-flow Waste: Outlet 50mm dia. Flow rate: 90-100 litres / min. (P or S-trap required)

FRAMELESS GLASS ENCLOSURE

- Thickness: 10mm toughened-glass.
- Standard Height: 2000mm. (Optional height)
- NZ Safety Standard compliant to AS/NZS 2206:1996
- Full enclosure with swing or sliding door, or 'Walk-in' panel-only
- Hinges -- Chrome-on-brass. Self-centring
- Handle -- Polished Stainless-steel Round 'D'. (Optional handles)
- Tray glazing channel -- Matte aluminium finish. Factory-applied
- Wall glazing channel -- Matte aluminium finish. Bright finish optional
- Channels applied directly to waterproofed walls

IMPRESA WRAP WALL MEMBRANE


- Peel and stick waterproof sheet membrane for shower walls
- Thickness 1mm nominal. Standard height 2000mm. Optional heights available
- Composition: Waterproof butyl-rubber self-adhesive with non-woven polyester fabric tileable surface.
- Compatible with approved polymer modified tiling adhesives. See 'Approved Waterproofing and Adhesives'
- Optional to liquid applied membranes
- *Available Auckland only

LIQUID APPLIED WALL MEMBRANES

- Optional to Impresa Wrap. Supplied by tiler or waterproofing sub-contractor. See 'Approved Waterproofing and Membranes'

INSTALLATION

- Tray to be installed with polymer-modified tile adhesive.
- Impresa Wrap Membrane to be applied by approved, licenced applicator
- Tile to be installed with correct tile adhesives. See 'Approved Waterproofing and Adhesives'
- Frameless-glass enclosure to be installed by an Impresa-approved or experienced frameless-glass installer

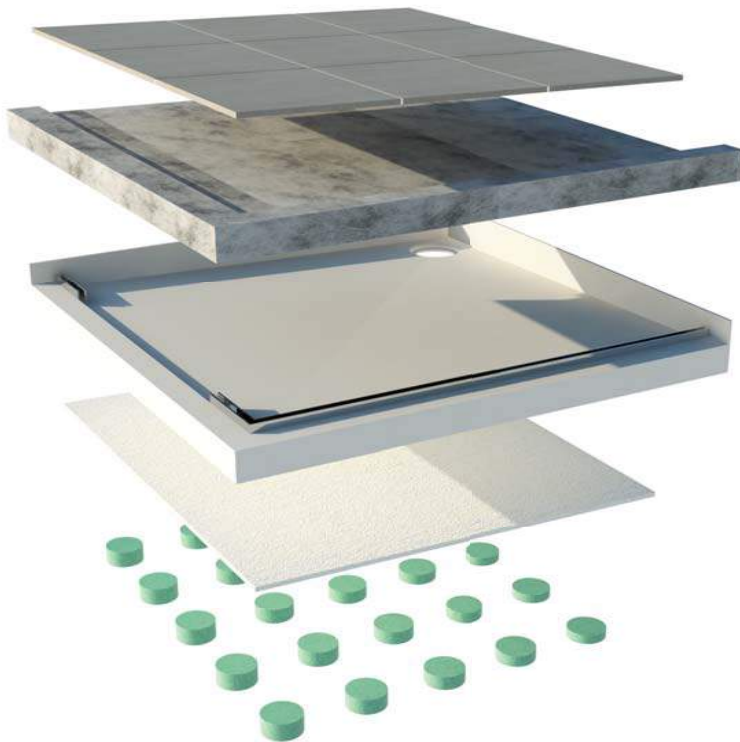

Tiles

Tiling membrane


Stile tray

Fibre-glass reinforcement


Tray support pads




Stile tray tiled

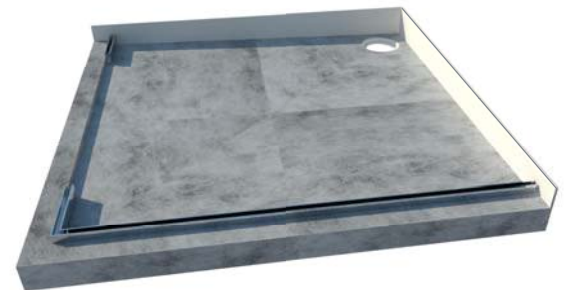

Stile tray before tiling

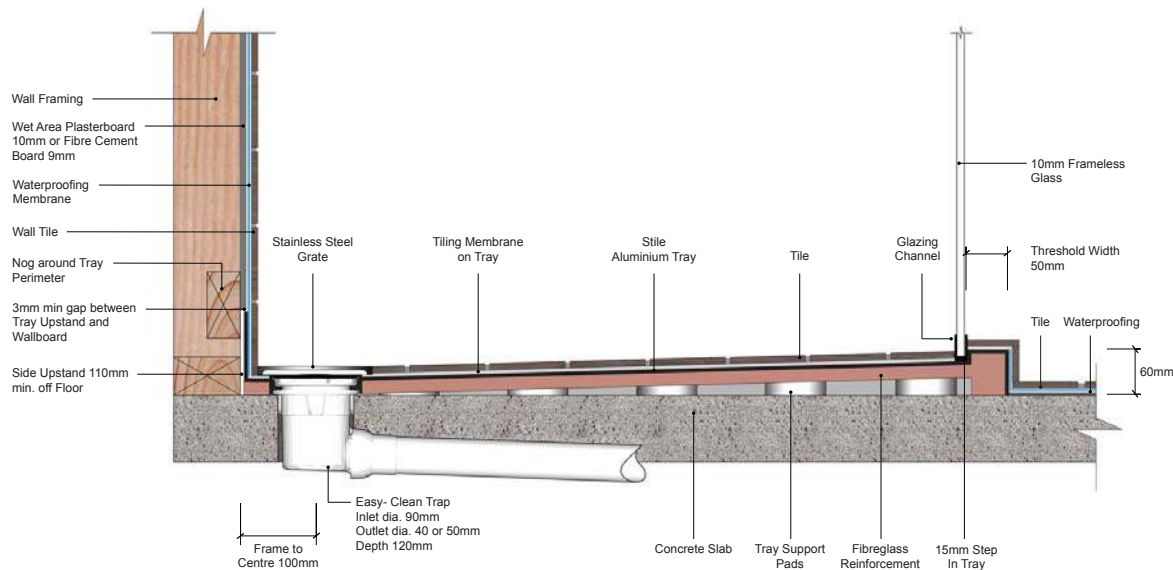

On-Floor installation
Suitable concrete or timber floor
Available with optional drain placement

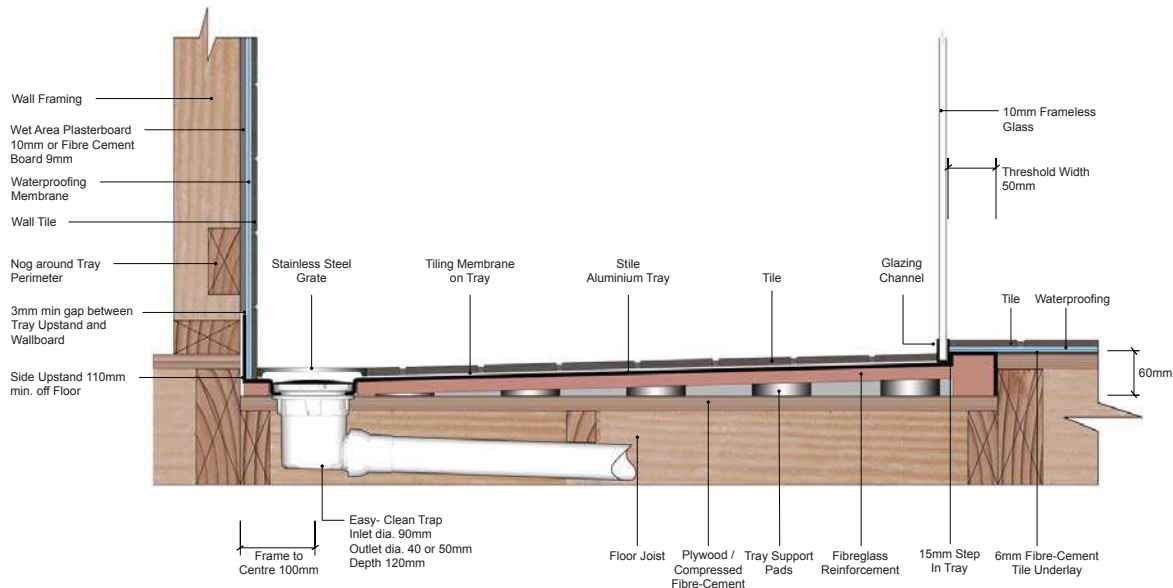

CUSTOM SIZE TRAYS AVAILABLE

Recessed Level-Entry installation
Suitable concrete or timber floor
Available with optional drain placement

:stile:stainless:

Featuring a one-piece stainless-steel shower tray for a timeless yet modern industrial look.

- 1.2mm thick, Brush-finish Stainless-steel
- Fibre-glass reinforced tray
- 10mm Frameless Glass
- **FULLY CUSTOMISABLE** (Tray and Glass)
- Full range of standard sizes / shapes
- **Platinum 25-Year Leak Proof Guarantee on tray**




MADE TO MEASURE



10mm GLASS

:stile:stainless:

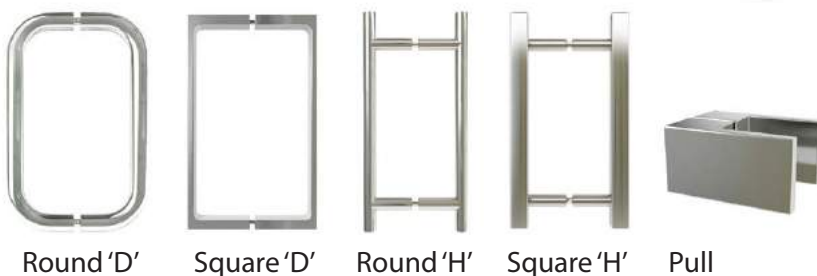

HANDLE OPTIONS

Stile Stainless Tray

- Tray options: On-Floor / Level-Entry / Wheelchair-Entry
- One-piece, 1.2mm thick, Brush-finished Stainless-steel
- Standard Drain Position: Centre
- **Custom** sizes and drain placement optional
- Generous side-upstands
- Correct drainage-gradients manufactured into tray
- Tray glazing channels factory-attached
- Tray underside fully supported -- no flexing
- Easy-clean trap
- Simple to install
- **Platinum 25-Year Leakproof Guarantee**




Frameless Glass Enclosure


- **10mm** thick toughened glass.
- Standard height 2000mm. Optional height available
- NZ Standard compliant to AS/NZS 2206:1996
- Full enclosure, sliding door, panel-only options
- **Custom options** -- Ultra-clear, floor-to-ceiling, frosted
- Matt aluminium-finish anodised glazing channels
- -- Tolerance for out-of-plumb walls
- Quality chromed-brass, self-centring hinges
- Polished Stainless-steel Round 'D' Handle set standard (Optional handles available)
- 10 Year Warranty

2-SIDED CORNER SHOWER

LEFT-HAND

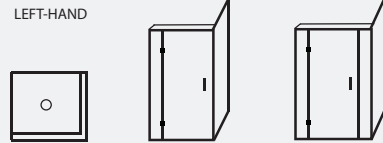


RIGHT-HAND

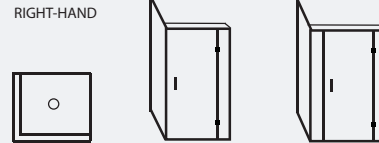


900 x 900
1000 x 1000
1100 x 1100

2-SIDED RECTANGLE SHOWER

LEFT-HAND

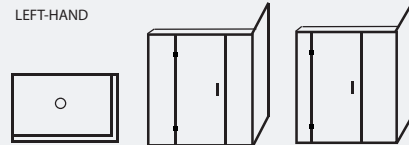


RIGHT-HAND

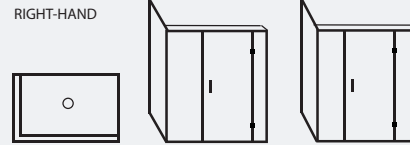


1200 x 900
1200 x 1000
1500 x 900

3-SIDED ALCOVE SHOWER

LEFT-HAND




RIGHT-HAND




900 x 900
1000 x 900
1000 x 1000
1200 x 900
1200 x 1000
1500 x 900

ANGLE SHOWER

LEFT-HAND



RIGHT-HAND



900 x 900
1000 x 1000
1100 x 1100

NOTE: Door Arc 180° - Inward / Outward

Stile Stainless Shower Specifications

:stile:stainless:

STILE STAINLESS SHOWER BASE / TRAY

- One-piece, 1.2mm thick, Brush-finished Stainless-steel
- Fibreglass-reinforced tray underside. Fully supported
- Centre drain outlet
- STANDARD SIZES: 15
- Glazing channels: Bright-polished finish
Factory-installed to inside of tray
- Platinum 25-Year Leakproof Guarantee

ON-FLOOR TRAY

- 'On-Floor' tray -- Installation on timber or concrete floor Threshold height 50mm. Threshold width 50mm.
- 'Step-down' 15mm from top of the threshold into tray for optimum water containment

LEVEL-ENTRY TRAY

- 'Level-Entry' tray (15mm step-down) -- Installation onto rebated timber or concrete floor

WHEELCHAIR ACCESS TRAY

- 'Wheelchair-Access' tray -- Flush entry (no step-down) -- Installation onto rebated timber or concrete floor.

EASY-CLEAN TRAP

- Standard position: Tray rear or front corner. Trap outlet pipe 40 / 50mm diameter
- Flow rate: 35 litres / min.
- Optional Hi-flow waste: Outlet 40mm diameter.
- Flow rate: 44 litres / min. (P or S-trap required)

FRAMELESS GLASS ENCLOSURE

- Thickness: 10mm toughened-glass.
- Standard Height: 2000mm. (Optional height)
- NZ Safety Standard compliant to AS/NZS 2206:1996
- Full enclosure with swing or sliding door, or 'Walk-in' panel-only
- Hinges -- Chrome-on-brass. Self-centring
- Handle -- Polished Stainless-steel Round 'D'. (Optional handles)
- Tray glazing channel -- Matte aluminium finish. Factory-applied
- Wall glazing channel -- Matte aluminium finish. Bright finish optional
- Channels applied directly to waterproofed walls

IMPRESA WRAP WALL MEMBRANE

- Peel and stick waterproof sheet membrane for shower walls
- Thickness 1mm nominal. Standard height 2000mm.
- Composition: Waterproof Butyl-rubber self-adhesive with non-woven polyester fabric tileable surface. Compatible with approved polymer-modified tiling adhesives. See 'Approved Waterproofing and Adhesives'
- Optional to liquid applied membranes
- *Available Auckland only

LIQUID APPLIED WALL MEMBRANES

- Optional to Impresa Wrap. Supplied by tiler or waterproofing sub-contractor. See 'Approved Waterproofing and Membranes'

INSTALLATION

- Tray to be installed with polymer-modified tile adhesive.
- Impresa Wrap Membrane to be applied by approved, licenced applicator
- Frameless-glass enclosure to be installed by an Impresa-approved or experienced frameless-glass installer




Quik NICHE Specifications

- Recessed shampoo / soap shelf unit
- 100% watertight
- One-piece, 3mm thick, epoxy-coated, marine-grade aluminium
- Horizontal or vertical installation
- Fits 90mm framing / wall cavity
- Suitable for plasterboard or fibre-cement board (6mm min. thickness)
- Compatible with all waterproof membranes
- CUSTOM SIZES AVAILABLE
- **Platinum 25-Year Leak Proof Guarantee**

Standard Sizes:

W	H	D
340	340	90mm
340	390	90mm
390	390	90mm
490	340	90mm
540	340	90mm
640	340	90mm
840	340	90mm
1140	340	90mm
200	150	90mm (footrest)

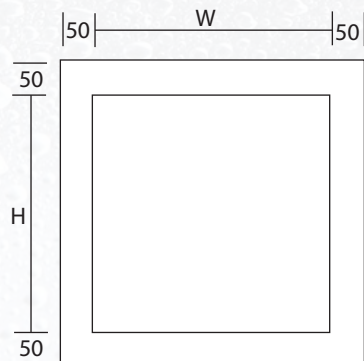

Easy Installation -- Ready to Tile
CUSTOM SIZES AVAILABLE



INSTALLATION

STEP 1

QUIK NICHE INSTALLATION TO FRAMING


Install framing / nogs to suit niche size and provide fixing for wallboard.
Adhere niche to framing by applying 'daubs' of supplied silicone to back-side of niche perimeter flanges. Niche is to finish flush with wallboard front surface. (6mm gap between niche and framing).



STEP 2

WALLBOARD AFFIXED TO FRAMING


Cut hole in plasterboard or fibre-cement wallboard slightly larger than niche and affix wallboard to framing.
Apply supplied 'peel and stick' membrane pieces to all niche surfaces and perimeter flanges.

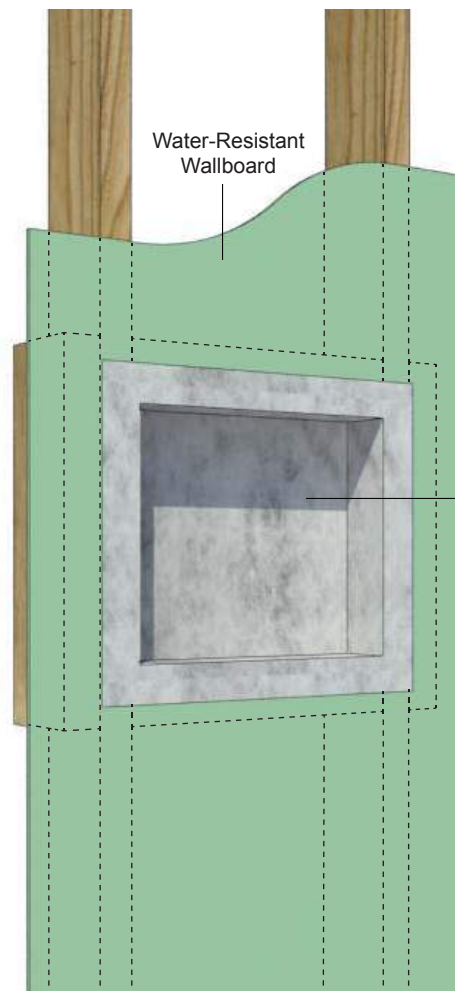

STEP 3

LIQUID-APPLIED WATERPROOFING APPLICATION

Waterproofer / tiler is to apply a 'bandage' connection tape to wallboard / niche perimeter joint. Liquid waterproofing to be applied to entire wallboard and over niche.

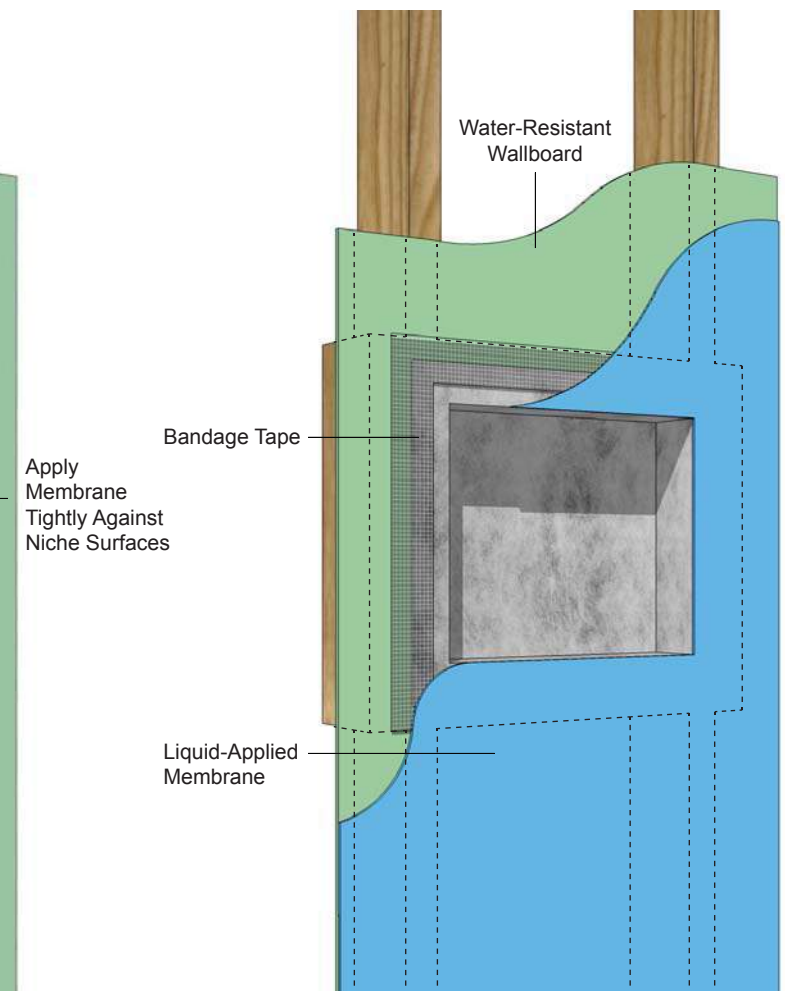



09 273 4545

www.impresa.co.nz

Ordering Impresa Products

Impresa tileable showers are proudly sold throughout NZ. All Impresa products may be purchased directly from Impresa by homeowners, designers, plumbers, and builders, nationwide. Alternatively, products can be ordered through any building / plumbing merchant or bathroom supply company. To discuss your special requirements or to place an order, please email us at contact@impresa.co.nz or ring our friendly team on 09 273 4545

Delivery Guarantee

Our freight company provides an efficient delivery to private residences, building sites, and commercial premises. Impresa guarantees all product will be received in good condition or the prompt remediation of any product damaged in-transit.

SHOWROOM BY APPOINTMENT ONLY:

6/38 Andromeda Cres.
East Tamaki, Auckland, 2013

Impresa Tile Shower Systems Ltd.
P. O. Box 64 – 403
Botany, Auckland 2163

P: 09 273 4545

W: www.impresa.co.nz

E: contact@impresa.co.nz

Impresa Tile Shower Systems Ltd.

WARRANTY STATEMENT

All Impresa (The Company) product warranties are for the stated duration as from the date of purchase. Impresa product warranties apply to the original installation of product supplied by The Company. All warranties apply to residential, domestic use of each product only. Impresa shower systems meet or exceed the standard requirements of the New Zealand Building Code. Impresa warranties apply to products only when installed correctly to The Company's written instructions. All due, onsite care of Impresa products is the responsibility of the Customer. The warranties do not cover damage or misuse to any Impresa product whilst in the possession of the Customer prior to or post the installation of the product. As a result of a claim, all products must be made available for an in-situ assessment by an Impresa representative. Should any material, manufacture thereof, or product be faulty as deemed by Impresa, The Company at its discretion may either refund the purchase price, repair the product, or replace the defective product. The Company is not financially responsible nor liable for any claim for consequential losses or damages. Proof of purchase must accompany any claim. The toughened-glass enclosure warranty provides cover for normal usage but not cover of breakage. Claims must be notified in writing to The Company within 60 days of the discovery of a possible fault or problematic use of a product.

<div>PLATINUM GUARANTEE</div> <div>25 YEARS</div> <div>LEAKPROOF</div>	<div>QUALITY GUARANTEE</div> <div>15 YEARS</div> <div>LEAKPROOF</div>	<div>QUALITY GUARANTEE</div> <div>10 YEARS</div> <div>QUALITY</div>
<p>SHOWER TRAYS / QUIK NICHES</p> <p>Impresa shower trays / Quik NICHES are guaranteed to be free of manufacturing defects which might result in the leakage of water (excepting tile surface-water) for a period of 25-years from the date of purchase. This warranty is subject to the respective specifications and installation instructions current at the time of installation.</p>	<p>IMPRESA WRAP</p> <p>Impresa Wrap is guaranteed to be free of manufacturing defects which might result in water penetration into the shower walls to which the membrane is applied, for a period of 15-years from the date of installation. Warranty is subject to Impresa Wrap specifications and installation instructions.</p>	<p>FRAMELESS-GLASS ENCLOSURES</p> <p>All glass supplied complies with AS/NZS 2208:1996 and is guaranteed for a period of 10 years from the date of purchase.</p> <p>All enclosure hardware is guaranteed for a period of 5 years from the date of installation.</p>

Impresa Tile Shower Systems Ltd.
P. O. Box 64 403
Botany, Auckland 2163

P: 09 273 4545
W: www.impresa.co.nz
E: contact@impresa.co.nz
© Impresa 2015

